



ΜΕΙΩΤΕΣ ΠΙΕΣΗΣ ΑΝΟΞΕΙΔΩΤΟΙ JIS 30K 316



CHRYSSAFIDIS

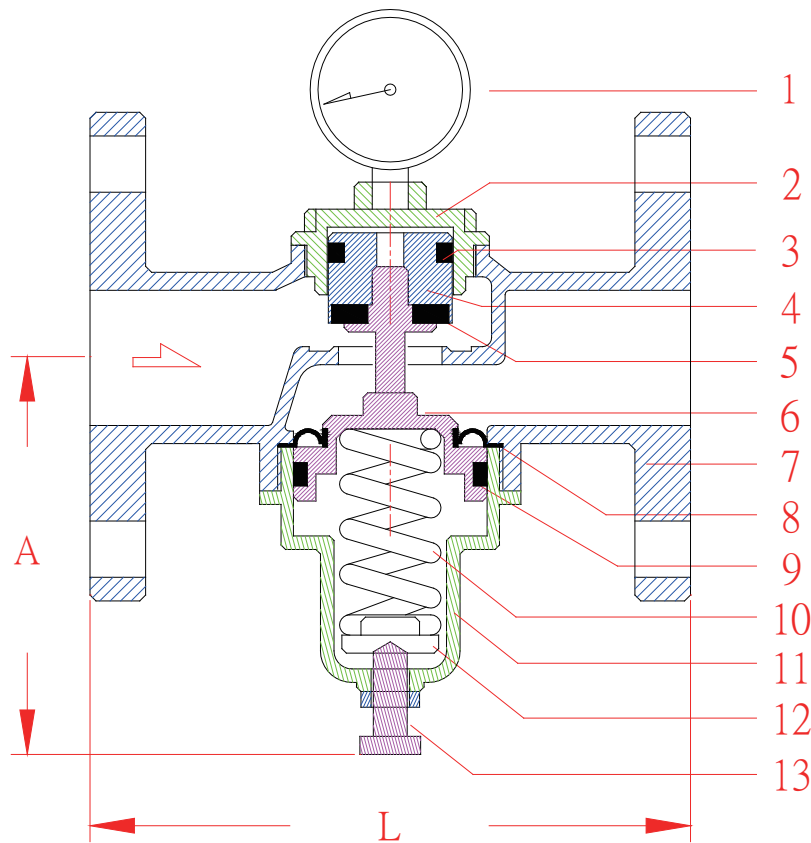

Model No.	Thread End
REF-15-S	1/2"
REF-20-S	3/4"
REF-25-S	1"
REF-40-S	1 1/2"
REF-50-S	2"

Flange Standard : JIS-30K			
Size	A	L	Flange Dia.
1/2"	85	150	115
3/4"	105	150	120
1"	105	150	130
1 1/2"	130	190	160
2"	130	190	165

No	Name	Material
1	Gauge	-----
2	Upper Cover	316 Stainless Steel
3	U-Ring	NBR / VITON
4	Piston	316 Stainless Steel
5	Sealing Spacer	NBR / VITON
6	Shaft	316 Stainless Steel
7	Main Body	316 Stainless Steel
8	Diaphragm	NBR / VITON
9	UH-Ring	NBR / VITON
10	Spring	Spring Steel
11	Lower Cover	316 Stainless Steel
12	Washer	Brass
13	Adjusting Stem	304 Stainless Steel

* Pressure Adjusting Range: 1kgf/cm² ~ 6kgf/cm²
4kgf/cm² ~ 10kgf/cm²
8kgf/cm² ~ 13kgf/cm²

(For special fluid and Special adjust Range please contact with us)

* Valve Body Testing Pressure: 45kgf/cm²
* Pressure needed from fully-closed gate to:
fully-opened gate : 1.5kgf/cm²

* Applied Temperature: -15°C ~ 100°C
Viton: 100°C ~ 150°C

* Gauge indicates the outlet pressure.

Z-Tide Valve

Article Name

DAPRV-SS316
JIS-30K

Designed

Unit

Drwg. No

Proj. No

Checked

Date

DAPRV-30K